

XC SRI (Service Reminder Indicator) Reset Procedures

Service and Repair

Resetting the service reminder indicator (SRI)

Hint: The indicator can also be reset using VADIS vehicle communication.

Resetting the Service reminder indicator (SRI), model years -2001

The service reminder indicator (SRI) informs the driver that it is time for the car to be serviced. The lamp remains lit for 120 seconds when the ignition is switched on.

Note! If the lamp flashes, it may be because one of the service parameters has not been programmed.

Proceed as follows to reset the service reminder indicator (SRI):

- * Ignition position I
- * Press and hold in the reset button for the trip odometer
- * Ignition position II
- * The service reminder indicator (SRI) starts flashing when the reset button for the trip odometer has been pressed for 10 seconds
- * Release the reset button for the trip odometer within 5 seconds. The instrument gives an audible signal when resetting has succeeded.

Note! If the trip meter reset button is not released within 5 seconds the indicator is not reset. However the indicator will stop flashing.

Resetting the service reminder indicator (SRI), model years 2002-

The service reminder indicator (SRI) informs the driver that it is time for the car to be serviced. The text message is displayed for 120 seconds each time the ignition is switched on.

Proceed as follows to reset the service reminder indicator (SRI):

- * Ignition position I
- * Press and hold in the reset button for the trip odometer
- * Ignition position II.

Note! Turn the key to position II within 2 seconds.

- * Hold the reset button for the trip meter pressed in until the original value has been reset.


Note! For all vehicles from the 2003 model year a general yellow lamp will light when the reset button must be released.

* Release the reset button for the trip odometer within 4 seconds. The instrument gives an audible signal when resetting has succeeded

* If the trip meter is already reset the reset button should be held in for a minimum of 10 seconds and a maximum of 14 seconds.

Note! If the reset button for the trip odometer is not released within 4 seconds, the service reminder indicator (SRI) is not reset.

Maintenance Required Lamp/Indicator

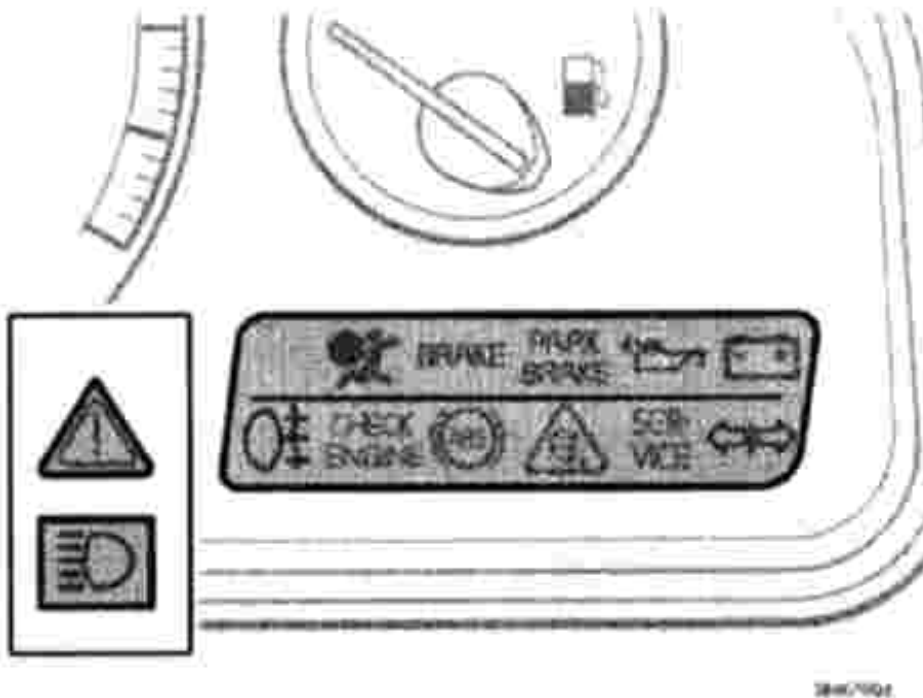

Description and Operation

SERVICE REMINDER INDICATOR :

This light will come on according to preset service intervals or after 750 hours of driving or after 12 months, whichever occurs first. It is a reminder to the driver that the service interval has been exceeded. The light will stay on for 2 minutes after start until reset by the servicing retailer.