

46: Drive shaft, CV joint, B5254T2, AW50/51 AWD

V70 XC (01-) / XC70 (-07), 2005, B5254T2, AW50/51 AWD, L.H.D

10/3/2012



PRINT

46: Drive shaft, CV joint, B5254T2, AW50/51 AWD

Drive shaft right,
replacing
Removal

**Note! Preparations See
Drive shaft left,
replacing:Preparations .**

**Remove the drive
shaft from the
gearbox**




Remove:

- the splash guard under the engine. See Transmission oil / oil filter, replacing:Remove the splash guard under the engine
- the cover for the drive shaft pilot bearing.

Pull the drive shaft straight out from the gearbox.


Note! Do not damage the drive shaft when removing it from the transmission.

Caution! Later models have a rubber seal on the constant velocity joint. Do not damage the seal. It will be needed for installation.

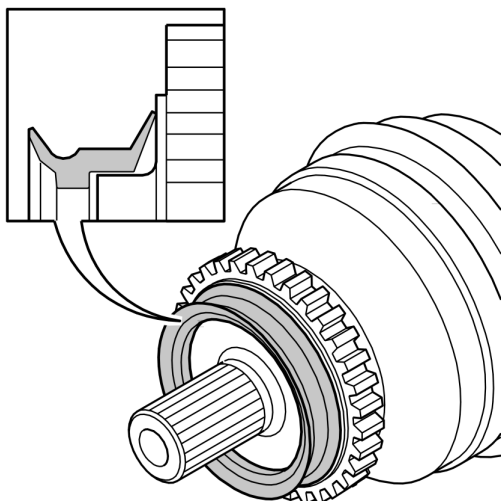

**Installing the drive
shaft**

**Install the drive shaft
in the gearbox**

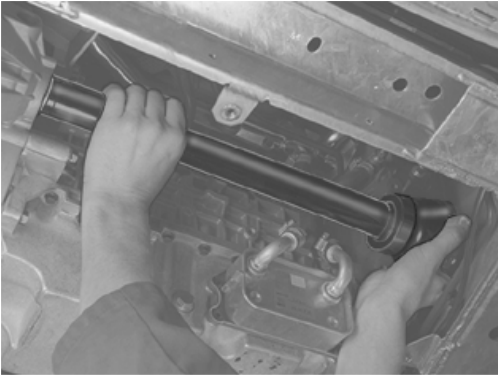**Note! Do not damage the seal.**

Install **new** cap (steel) for the drive shaft support bearing. Tighten to **25 Nm**.

Install the splashguard under the engine.

Align the drive shaft in the hub and the spring strut in the stub axle

See Drive shaft left, replacing: Align the drive shaft in the hub and the spring strut in the wheel spindle .

Adjust the stub axle to the dimension measured prior to removal

See Drive shaft left, replacing: Adjust the wheel spindle to the dimension measured prior to removal .

Installing brake components on the stub axle

See Drive shaft left, replacing: Installing brake components on the wheel spindle .

10/3/2012

PRINT